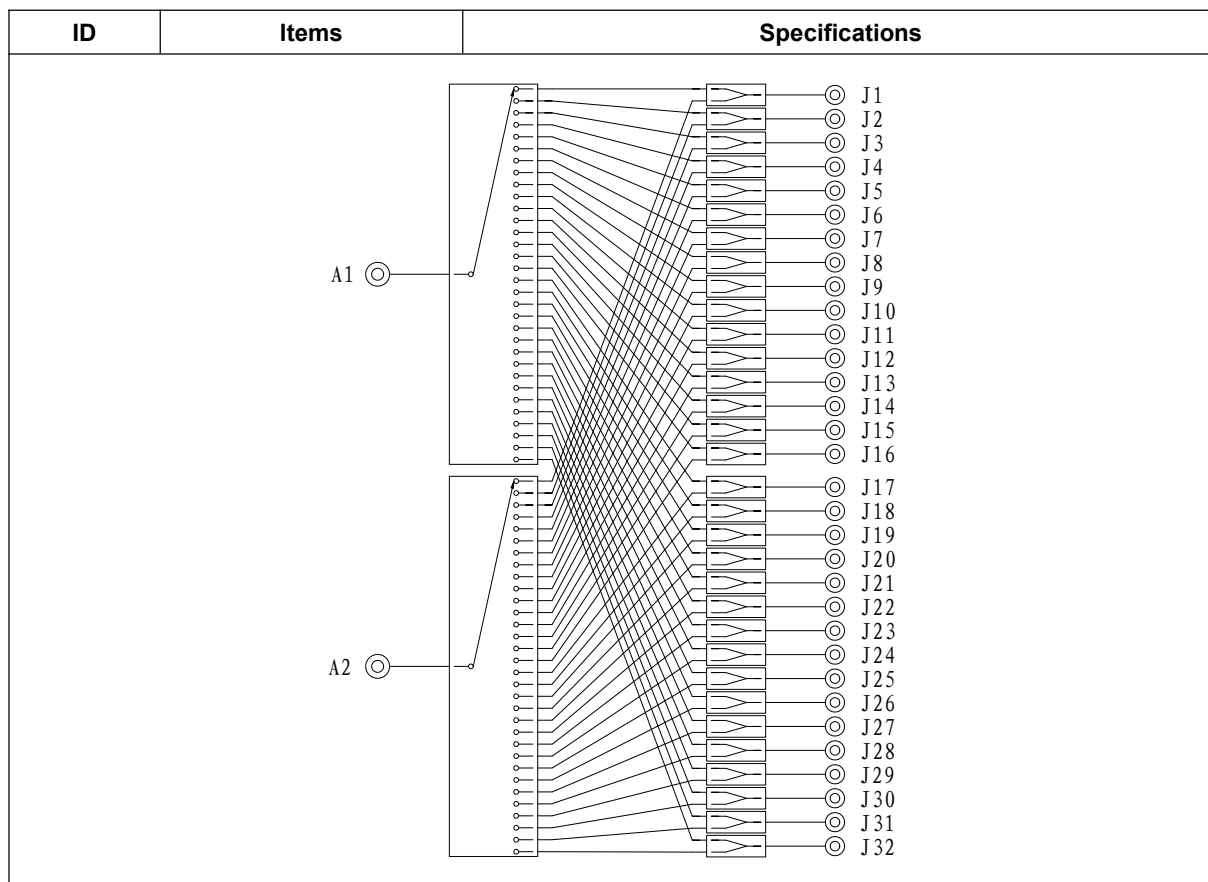


HX2P32T4081G Switch Matrix Module

1. Functional Block Diagram



2. Description


ID	Items	Specifications
2-1	Type	Absorptive 2*32 Switch Matrix Module
2-2	Frequency Range	0.4GHz ~ 8GHz
2-3	Isolation	≥80dB
2-4	Insertion Loss	≤9.5dB
2-5	VSWR	≤1.8
2-6	Impedance	50Ω
2-7	RF Input Power	2W
2-8	Switching Speed	≤200ns
2-9	Input/Output Connectors	SMA-F
2-10	Control Connector	DB15-Male
2-11	Control	TTL=0V/3.3V ~ 5V
2-12	DC Power Supply	+5V/≤3.0A

3. Environmental Specifications

ID	Items	Specifications
----	-------	----------------

3-1	Operational Temperature	-40°C ~ +70°C
3-2	Storage Temperature	-55°C ~ +85°C

4.Interface

ID	Items	Specifications
4-1	Control Connector	DB15-Male
		
4-2	NO	Specifications
	1	C1
	2	C2
	3	C3
	4	C4
	5	C5
	6	C6
	7	C7
	8	C8
	9	C9
	10	C10
	11	NC
	12	NC
	13	+5V
	14	NC
15	GND	

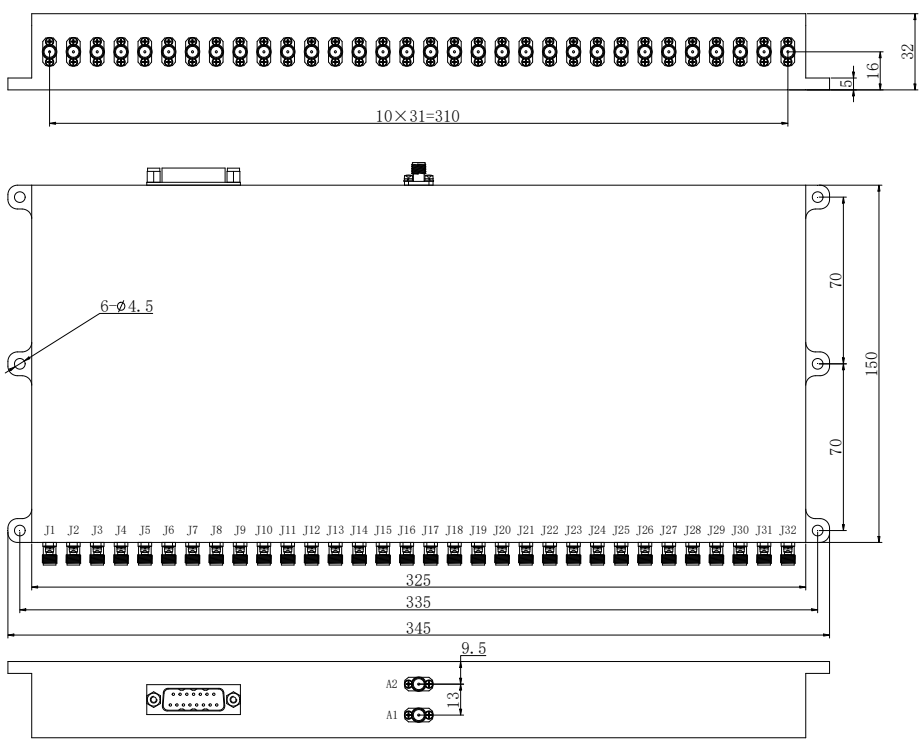
5.Truth Table

ID	C5	C4	C3	C2	C1	Signal Path State
5-1	0	0	0	0	0	A1-J1
	0	0	0	0	1	A1-J2
	0	0	0	1	0	A1-J3
	0	0	0	1	1	A1-J4
	0	0	1	0	0	A1-J5
	0	0	1	0	1	A1-J6
	0	0	1	1	0	A1-J7
	0	0	1	1	1	A1-J8
	0	1	0	0	0	A1-J9
	0	1	0	0	1	A1-J10
	0	1	0	1	0	A1-J11
	0	1	0	1	1	A1-J12
	0	1	1	0	0	A1-J13
	0	1	1	0	1	A1-J14

	0	1	1	1	0	A1-J15
	0	1	1	1	1	A1-J16
	1	0	0	0	0	A1-J17
	1	0	0	0	1	A1-J18
	1	0	0	1	0	A1-J19
	1	0	0	1	1	A1-J20
	1	0	1	0	0	A1-J21
	1	0	1	0	1	A1-J22
	1	0	1	1	0	A1-J23
	1	0	1	1	1	A1-J24
	1	1	0	0	0	A1-J25
	1	1	0	0	1	A1-J26
	1	1	0	1	0	A1-J27
	1	1	0	1	1	A1-J28
	1	1	1	0	0	A1-J29
	1	1	1	0	1	A1-J30
	1	1	1	1	0	A1-J31
	1	1	1	1	1	A1-J32
ID	C10	C9	C8	C7	C6	Signal Path State
5-2	0	0	0	0	0	A2-J1
	0	0	0	0	1	A2-J2
	0	0	0	1	0	A2-J3
	0	0	0	1	1	A2-J4
	0	0	1	0	0	A2-J5
	0	0	1	0	1	A2-J6
	0	0	1	1	0	A2-J7
	0	0	1	1	1	A2-J8
	0	1	0	0	0	A2-J9
	0	1	0	0	1	A2-J10
	0	1	0	1	0	A2-J11
	0	1	0	1	1	A2-J12
	0	1	1	0	0	A2-J13
	0	1	1	0	1	A2-J14
	0	1	1	1	0	A2-J15
	0	1	1	1	1	A2-J16
	1	0	0	0	0	A2-J17
	1	0	0	0	1	A2-J18
	1	0	0	1	0	A2-J19
	1	0	0	1	1	A2-J20
	1	0	1	0	0	A2-J21
	1	0	1	0	1	A2-J22
	1	0	1	1	0	A2-J23

	1	0	1	1	1	A2-J24
	1	1	0	0	0	A2-J25
	1	1	0	0	1	A2-J26
	1	1	0	1	0	A2-J27
	1	1	0	1	1	A2-J28
	1	1	1	0	0	A2-J29
	1	1	1	0	1	A2-J30
	1	1	1	1	0	A2-J31
	1	1	1	1	1	A2-J32

6.Outline Drawing

ID	Items	Specifications
6-1	Outline Drawing	Unit: mm
<p>Tolerances:±0.5mm</p> 		
6-2	Material	Aluminum
6-3	Finish	Nickel Plated
6-4	Weight	/

7.Note

7-1	Should be take the ESD protection during use.
7-2	Exceeding the rated input power limit may cause the product to burn out.
7-3	Avoid using in extreme temperature, humidity, or corrosive environments.
7-4	Good grounding can reduce EMI and RFI.
7-5	All specifications are subject to change without notice at any time.